

GET READY!!!!

YOUR ROOF LEAK SOLUTION IS

HERE!!!



- Adheres to Asphalt Shingles and other types of roofing materials.*
- Can be applied as low as 0°F.
- Adheres to damp surfaces (no standing water).
- Withstands immediate water contact.
- Clear—No ugly asphalt/tar patching!
- * Not for use on EPDM Rubber.


DYNA-SEAL™ elastomeric roof repair and leak stopping products are available both in DYNA-SEAL Brushable Sealant (1 gal. can as shown) for brush application, and DYNA-SEAL Elastomeric Caulk (10 oz. tube as shown) for filling joints and cracks wider than 1/16". The two products exhibit excellent adhesion to each other when used together, or they can be used separately.

To order, go to

www.dynasolv.com

OR call 1-888-477-6839.


Dynamic Coating Solutions is a division of CREATIVE MATERIAL TECHNOLOGIES, LTD.
21 Wilbraham St, Unit B11, Palmer, MA 01069

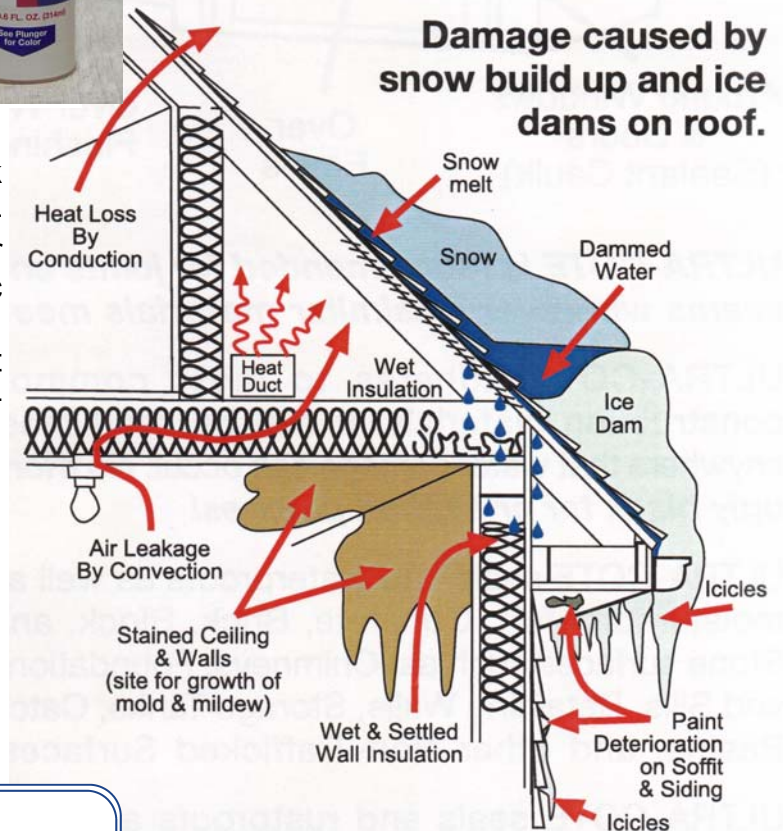

DYNASOLV
Dynamic Solutions for Everyday Building Problems

Dynamic Coating Solutions
www.dynasolv.com
1-888-477-6839

Where To Use DYNA-SEAL™

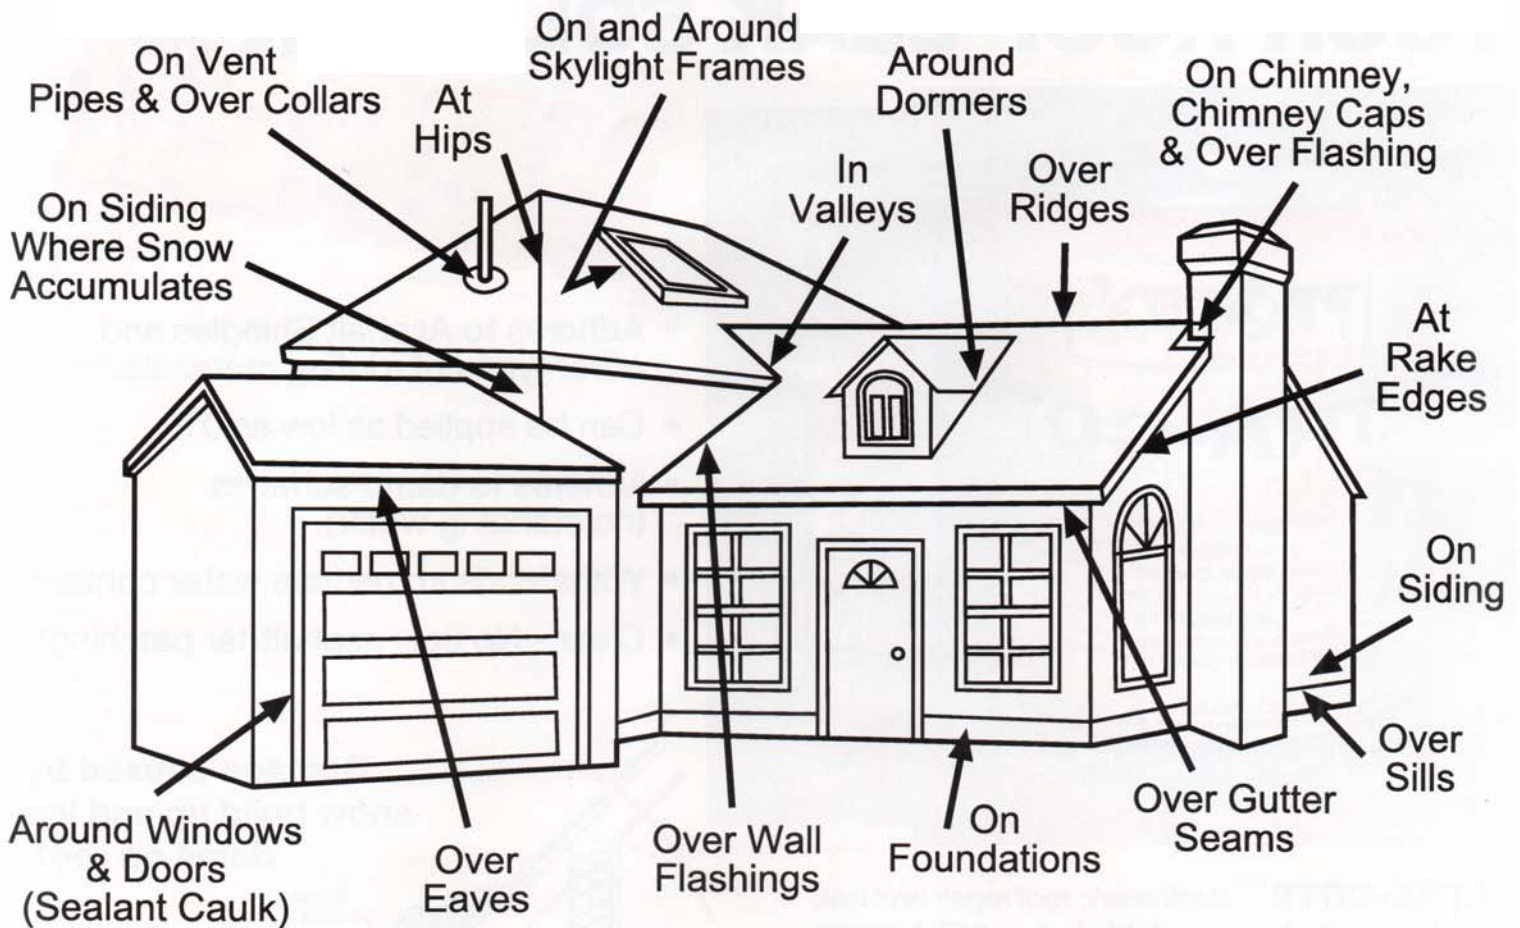

DYNA-SEAL is recommended for joints and seams wherever dissimilar materials meet.

DYNA-SEAL adheres to most common construction materials. It can be used most anywhere that water damage can occur. **No more ugly black tar or asphalt patches!**

DYNA-SEAL seals and waterproofs as well as moistureproofs^{**}: Concrete, Brick, Block, and Stone surfaces such as: Chimneys, Foundations and Sills, Retaining Walls, Storage Tanks, Catch Basins, and other Non-Trafficked Surfaces!

DYNA-SEAL seals and rustproofs all metal surfaces and clear coats copper. It seals, protects, and waterproofs Wood, Asphalt surfaces, Marble, Ceramic Tile, Fiberglass, Plastics, and Glass.

* Not for use on EPDM rubber.

Theoretical Yield:

Surface Type	Sealant Thickness	Yield (approx.)
Smooth (i.e. Sheet Metal)	1/16" (62 mils)	100 sq. ft.
Porous (i.e. Wood Shingles)	1/16" (62 mils)	25 sq. ft.

TECHNICAL DATA:

Flash Point	108 degrees F
Tack Free Time	1 hour
Elongation	>600%
Application Temperature	0 degrees F to 140 degrees F
Service Temperature	-40 degrees F to 180 degrees F

^{**} Water Vapor Transmission 2.6 mg/sq. cm/24 hour

^{**} Water Vapor Permeance .21 (metric)

For more information or to order online go to:

www.dynasolv.com

or call 1-888-477-6839.

Dynamic Coating Solutions is a division of
CREATIVE MATERIAL TECHNOLOGIES, LTD.
 21 Wilbraham St., Unit B11, Palmer, MA 01069
 ©Creative Material Technologies, Ltd.